

Chatillon® TT Series Pneumatic Force Tester

Specification Sheet

SS-TT-0210

February 2010


The CHATILLON® TT Series is a pneumatically-operated tester for measuring breaking strength of electrical leads, terminals, connectors, wire wraps, etc. It is ideal for areas where intrinsic safety is required (when used with a mechanical gauge). The TT Tester operates using clean, dry air with a maximum air pressure up to 160 psig (11.2 bar). The TT Tester meets MIL-T-7928 (ASG) requirements for crimped, solderless lugs. The tester may be used for tensile or compression testing. The rapid test speed makes it ideal for production line testing, incoming inspection testing or for the R&D laboratory. The TT Tester features a 6-inch (15 cm) test stroke. Ram speed may be controlled as low as 0.1-inch (2.5 mm) per minute. The TT Tester is available in two models: one with a foot-actuated switch; the other with a hand-actuated switch.

Features

- Simple to Operate
- Meets MIL-T-7928 (ASG) Requirements
- 6-inch Stroke
- Precise Ram Speed Control to 0.1 in/min
- Independent Return Speed
- Automatic Retracting Jaws
- Mounts to Chatillon DF Series Force Gauges
- 1 Year Warranty

Specifications

Load Capacity:	500 lbf, 2.5 kN
Sample Size:	Up to 15 inch (380mm) 7/32 OD
Crosshead Speed:	6 in/min
Travel:	6 inches (152mm)
Jaw Opens:	7/32 inch (5.6mm)
Jaw Closes:	1/2 inch (12mm)
Load Measurement:	Chatillon DF Gauges
Air Motor:	
For 225 lbf (1 kN):	Requires 60 psi (4.2 bar)
For 550 lbf (2.5 kN):	Requires 125 psi (8.7 bar)
Operating Temperature:	40°F to 110°F 5°C to 45°C
Instrument Weight:	50 lbs (25 kg)
Shipping Weight:	65 lbs (30 kg)

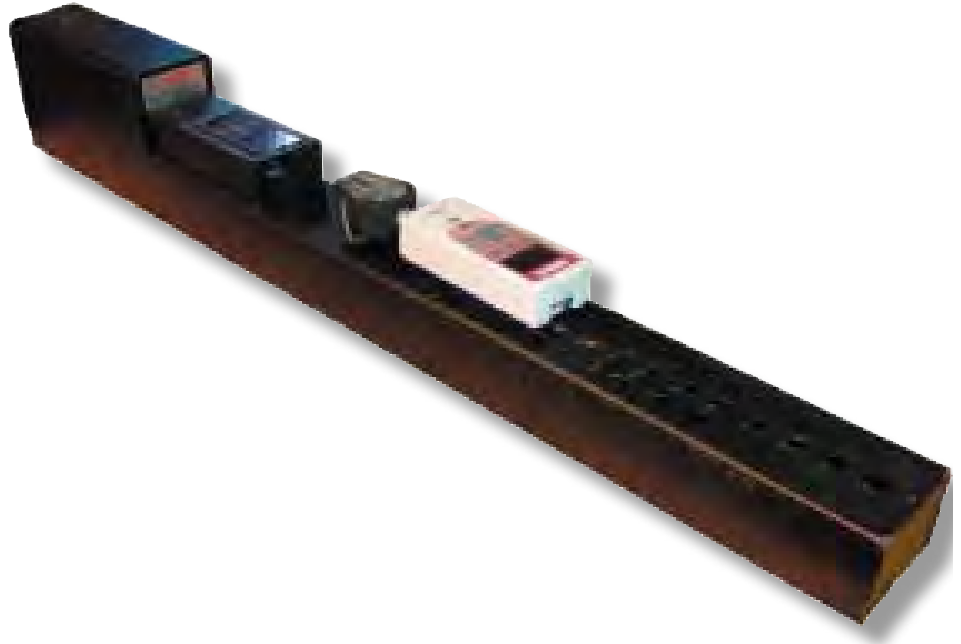

Shown: TT Tester Series with optional Chatillon DFE Series digital force gauge.



Quality Assured.

AMETEK® | **Chatillon®**
Force Measurement

Ordering

TT Series

Model	Description
ML3317	Hand Operated Switch
ML3353	Foot Operated Switch

Standard Accessories

Part No.	Description
NC002582	DF Gauge Mounting Kit
ML1797	Foot Pedal (ML3353 only)

Optional Accessories


Part No.	Description
ML1797	Foot Pedal Controller
ML4242	Jaw Replacement Kit



Shown: ML4242 Jaw Replacement Kit



Shown: ML1797 Foot Pedal Controller. Supplied standard with ML3353.

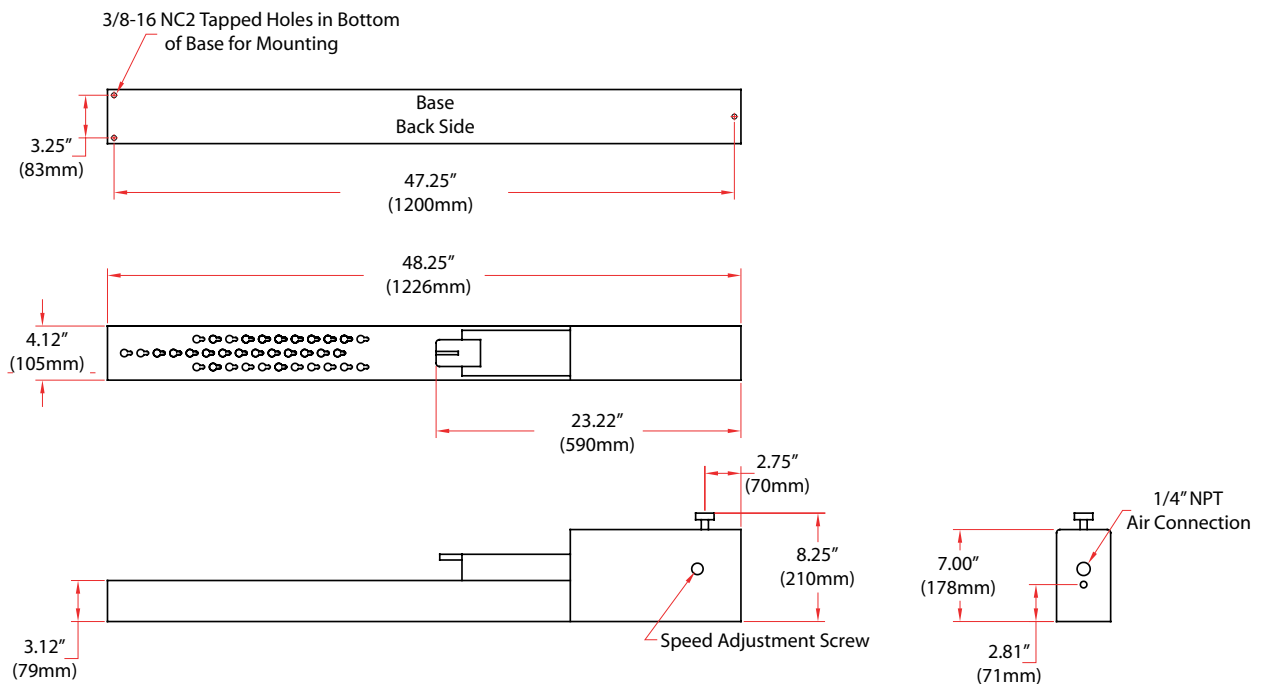

E96-369

AMETEK

MEASUREMENT & CALIBRATION TECHNOLOGIES

For the authorized Chatillon Distributor or Manufacturer's Representative near you, go to www.chatillon.com

Americas
AMETEK
Measurement & Calibration
Technologies
8600 Somerset Drive
Largo, Florida 33773
United States of America
Tel +1-727-536-7831
Tel +1-800-527-9999
Fax +1-727-539-6882
Email chatillon.fl-lar@ametek.com

United Kingdom
Lloyd Instruments Ltd.
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
United Kingdom
Tel +44 (0) 1243 833 370
Fax +44 (0) 1243 833 401
Email uk-far.general@ametek.co.uk

France
AMETEK S.A.S.
Rond Point de l'Epine des Champs
Buro Plus - Bat. D
78990 Elancourt
France
Tel +33 (0)1 30 68 89 40
Fax +33 (0)1 30 68 89 49
Email general@lloyd-instruments.com

Germany
AMETEK GmbH
Rudolf-Diesel-Strasse 16
D-40670 Meerbusch
Germany
Tel +49 (0)2159 9136-70
Fax +49 (0)2159 9136-39
Email info@ametek.de

Singapore
AMETEK Singapore Pvt. Ltd.
10 Ang Mo Kio Street 65
#05-12 Techpoint
Singapore 569059
Tel +65-6484-2388
Fax +65-6481-6588
Email aspl@ametek.com.sg

Visit Us on the Worldwide Web at:
www.chatillon.com

© 2010 by AMETEK, Inc.

Information within this document is subject to change without notice.

ISO 9001/2000
ISO/IEC 17025
Manufacturer